

Model  
**GX4**

(주)한영전지



27가 40-11  
TEL: (02)679-0941 FAX: (02)678-5899  
A/S TEL: (080)979-1010  
http://www.hanyoungelec.co.kr




Version 1.0



1

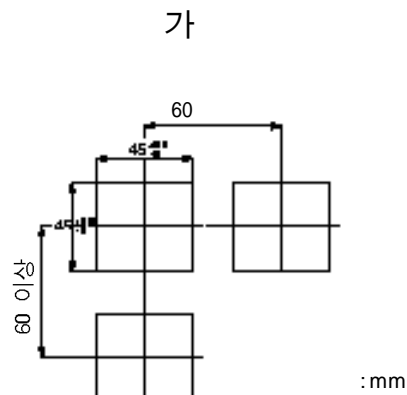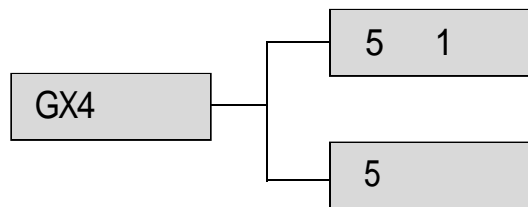


4

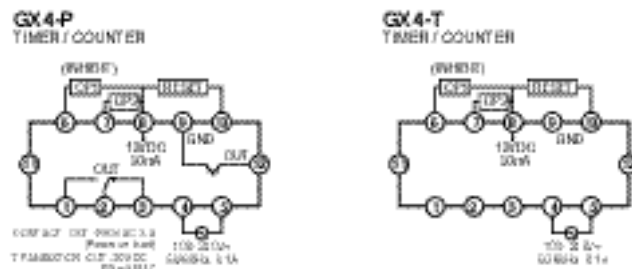


5

GX4	
Input Voltage	100-240 VAC ~ 50/60 Hz, AC/DC 24 V
Accuracy	-10%, +10%
Power Consumption	90 ~ 110%
Power Rating	5VA (220 VAC 60 Hz)
Timing Accuracy	±0.5%
Resolution	0.02
Operating Voltage	12 VDC 50 mA Max
Output Capacity	AC250 V 3 A (COSφ=1) 30 VDC 100 mA MAX
Operating Temperature	-10 ~ 55 °C
Storage Temperature	-20 ~ 65 °C
Humidity	35 ~ 85 %RH

2

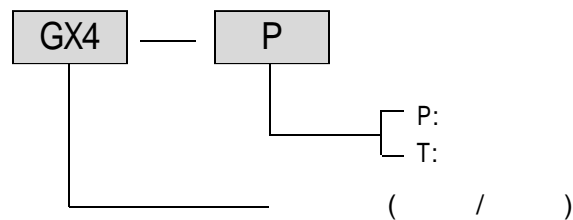

3

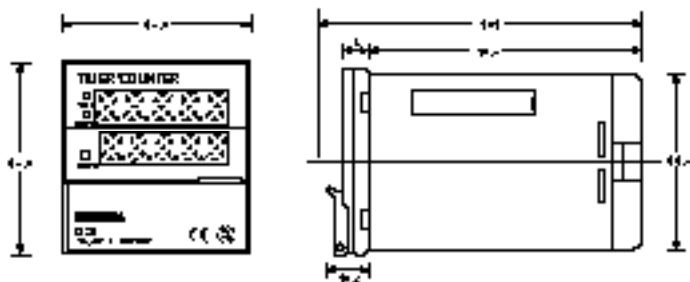


6

GX4	
Accuracy	±0.01% ± 0.05 ( )
Accuracy	±0.005% ± 0.003 ( )
Accuracy	( )
Output Capacity	100 M (DC 500 V 가 )
Input Voltage	AC2000 V 50/60 Hz 1 ( ) AC1000 V 50/60 Hz 1 ( )
Output Voltage	6 KV ( ) 6 KV ( )
Accuracy	±2 KV ( ) ± 500 V ( )
Frequency	10 ~ 55 Hz 0.75 mm
Frequency	10 ~ 55 Hz 0.5 mm
Shock	300 m/s² ( 30 G)
Shock	100 m/s² ( 10 G)
Counting Rate	1,000
Current	10 (AC250 V 3 A )
Weight	138 g ( )




Counting Rate	60
Resolution	가 0.1s
Mode	N
Mode	ON DELAY
Mode	U-A
Mode	F
Mode	500 ms
Mode	30 cps
Mode	1 : 1

7

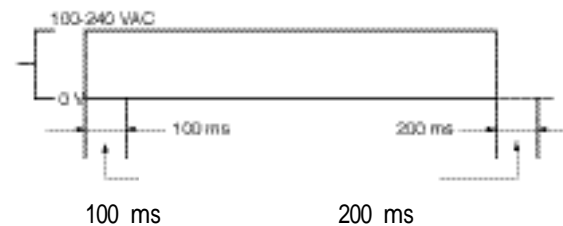


8

- 1 1 (ON · OFF )
- ON · OFF
- 가
- 30 cps : 16 ms
- 1K cps : 0.5 ms
- 2K cps : 0.25 ms
- 5K cps : 0.1 ms



9

- (NOISE)
- (IMPULSE) 2 kV, 1 μs
  - 2 kV, 1 μs
  - MP (Oil) 0.1 ~ 1 μF
  - (IMPULSE)
  - (Short)
  - 가 가
  - 가 가
  - OFF · ON 가

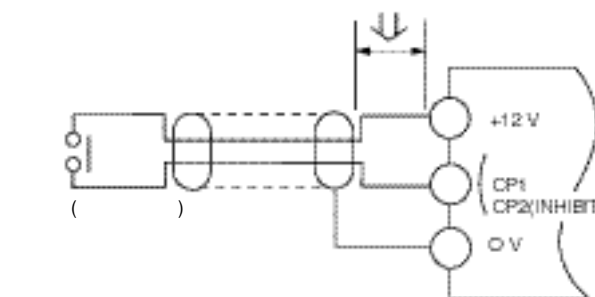

10

	10	60
0.1s	9999.9 s	9h 59m 59s
0.01s	999.99 s	59m 59.9s
0.1s	99999 s	9h 59m 59s
0.1s	99999 m	999h 59m

