



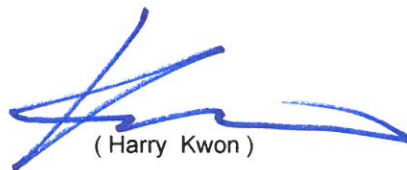
Product Service

Attestation of Conformity

No. N8A 18 07 98238 020

Holder of Certificate: HANYOUNG NUX CO., LTD.28, Gilpa-ro 71beon-gil, Nam-gu
Incheon 22121
REPUBLIC OF KOREA**Product:** Electrical equ. for measurement, control
and laboratory use
(LCD Counter & Timer)**Model(s):** LCw-PxyzA
(w: Demensions, x: Display digits,
y: Control output, z: Sub-output)**Parameters:**
Rated input voltage: 100-240 V~
Rated input power: 12 VA
Rated frequency: 50/60 Hz
Protection class: Class II
Degree of protection
against ingress of liquids: IPX0**Tested according to:** EN 61010-1:2010

This Attestation of Conformity is issued on a voluntary basis according to the Low Voltage Directive 2014/35/EU relating to electrical equipment designed for use within certain voltage limits. It confirms that the listed equipment complies with the principal protection requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for testing and certification. See also notes overleaf.

Test report no.: CPSA01384817**Date,** 2018-07-03
(Harry Kwon)

After preparation of the necessary technical documentation as well as the EU declaration of conformity the required CE marking can be affixed on the product. The declaration of conformity is issued under the sole responsibility of the manufacturer. Other relevant EU-directives have to be observed.



Product Service

Attachment to the Certification

No. N8A 18 07 98238 020

Additional model description:

LCw-PxyzA

w: Dimensions – 3, 4, 5, 6;

x: Display digits – 4, 6;

y: Control output – 1, 2;

z: Sub-output – N, C

| Model | Code | | | | | | Description |
|----------------|----------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------------------|
| LC | <input type="checkbox"/> - | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | LCD Counter & Timer |
| Dimensions | 3 | | | | | | 96(W) × 48(H) x 74.6(D) mm |
| | 4 | | | | | | 48(W) × 48(H) x 84.5(D) mm |
| | 6 | | | | | | 72(W) × 36(H) x 88.3(D) mm |
| | 7 | | | | | | 72(W) × 72(H) x 97.8(D) mm |
| Settings | | P | | | | | Preset Counter & Timer |
| Display digits | | | 4 | | | | 4 digits (9999) ※LC4 only |
| | | | 6 | | | | 6 digits (999999) |
| Control output | | | | 1 | | | 1-stage output, Power rating: 11 VA |
| | | | | 2 | | | 2-stage output, Power rating: 12 VA |
| Sub output | | | | | N | | No sub output |
| | | | | | C | | RS485 (MODBUS-RTU) |
| Power voltage | | | | | | A | 100 – 240 V a.c. 50/60 Hz |

Date: 2018-07-03

Page 2 of 2